


Utility hangers

Category: Hangers and brackets


Pipehanger (J-Bolt) (J-Hook) - for 3/16" Chain or 1/4" Chain

- C1055 material
- E = Ø9/16"
- L = 18" and 24" overall
- Recommended max. load rate of 2,000 lbs
- 3/4" recommended max. load rate of 3,600 lbs

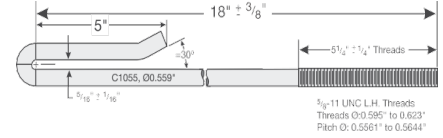


Bullhorn - Square Timber Support

- 44W material
- E = Ø1", Ø1 1/8" and Ø1 1/4"
- L = 18", 24", 30" and 36"
- S = 8" x 8", 10" x 10" and 12" x 12"

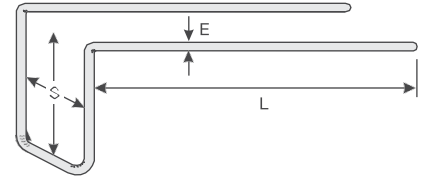


S-Hook Hanger

- 44W material
- E = Ø5/16"
- L = 8 1/2" overall
- Also available plastic coated (for electrical use)

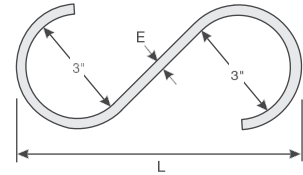

Sill Nut (Eye Nut)

- available in: ductile iron – recommended max. load rate of 2000 lb
- 5140 alloy -recommended max. load rate of 4000 lb
- L = 4 1/2" overall
- 5/8" - 11, 3/4" - 10, 7/8" - 9, and
- 1" - 8 UNC thread



Hook Type Pipe Hangers

- A safety factor of 6:1 has been applied to the failure load on the design.
- Loads are valid for static loads only with no allowance being made for shock load or vibration.
- Corrosion protection may be provided by hot dip galvanizing.



Legal disclaimer

All dimensions, weights, quantities, and specifications are those applicable at the time of this publication and may be amended from time to time. Please contact your local representative for final confirmation of any key specifications.

Scan to get our app



iOS



Android